

STANDARD RESPONSE AUTOMATIC SPRINKLERS GL SERIES INTERMEDIATE LEVEL UPRIGHT • PENDENT

SPECIFICATIONS

NOMINAL "K" FACTOR	THREAD SIZE	LENGTH	FINISHES
5.6 (80 metric)	1/2"NPT (15mm)	2 1/4" (5.7cm)	Factory Bronze ¹
8.0 (115 metric)	1/2"NPT (15mm)	2 1/4" (5.7cm)	
8.0 (115 metric)	3/4"NPT (20mm)	2 7/16" (6.2cm)	
11.2 (160 metric)	3/4"NPT (20mm)	2 7/16" (6.2cm)	

NOTE: METRIC CONVERSIONS ARE APPROXIMATE.
¹OTHER FINISHES AVAILABLE ON SPECIAL ORDER.

APPROVALS

STYLE	SIN (previous SIN)	"K" FACTOR	HAZARD ¹	135°F (57°C)	155°F (68°C)	175°F (79°C)	200°F (93°C)	286°F (141°C)	cULus	FM	SHIELD P/N
UPRIGHT	GL5663	5.6	ALL	X	X	X	X	X	X	X	N/A
	GL8163	8.0*		X	X	X	X	X	X	---	
	GL8166	8.0		X	X	X	X	X	X	X	
	GL1168	11.2		---	X	X	X	X	X	**X	
PENDENT	GL5651 (GL5672)	5.6	ALL	X	X	X	X	X	X	X	325706
	GL8151 (GL8172)	8.0*	ALL	X	X	X	X	X	X	---	325706
	GL8156 (GL8158)	8.0	ALL	X	X	X	X	X	X	X	325707
	GL1160 (GL1161)	11.2	ALL	---	X	X	X	X	X	---	325707


[§]THE WATER SHIELD FOR THE PENDENT MAY BE EITHER FACTORY FITTED OR INSTALLED IN THE FIELD, PLEASE SPECIFY ON ORDER.

¹SPRINKLERS SHALL BE LIMITED AS PER THE REQUIREMENTS OF NFPA13 AND ANY OTHER RELATED DOCUMENTS.

**NO FM APPROVALS FOR 175°F (79°C)

*1/2"NPT; RETRO-FIT ONLY

ALL: ALL HAZARDS

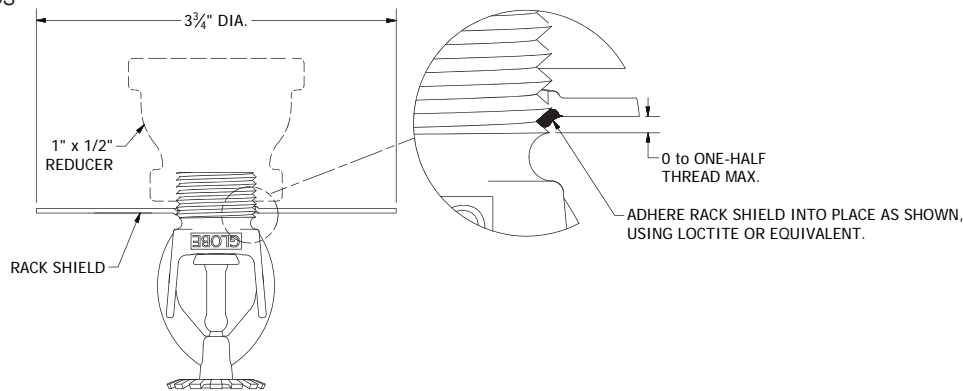

NOTE: INSTALL RACK SHIELD ONTO SPRINKLER THREADS BEFORE SYSTEM INSTALL.

ORDERING INFORMATION

SPECIFY

- Quantity • SIN • Style • Orifice
- Thread Size • Temperature • Finishes desired
- Quantity - Wrenches - P/N 325390 (1/2"); P/N 312366 (L.O.); P/N 333010 (E.L.O.)

GLOBE® PRODUCT WARRANTY

Globe agrees to repair or replace any of its own manufactured products found to be defective in material or workmanship for a period of one year from date of shipment.

For specific details of our warranty please refer to Price List Terms and Conditions of Sale (Our Price List).

